

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**


Defective images within this document are accurate representations of the original documents submitted by the applicant.


Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

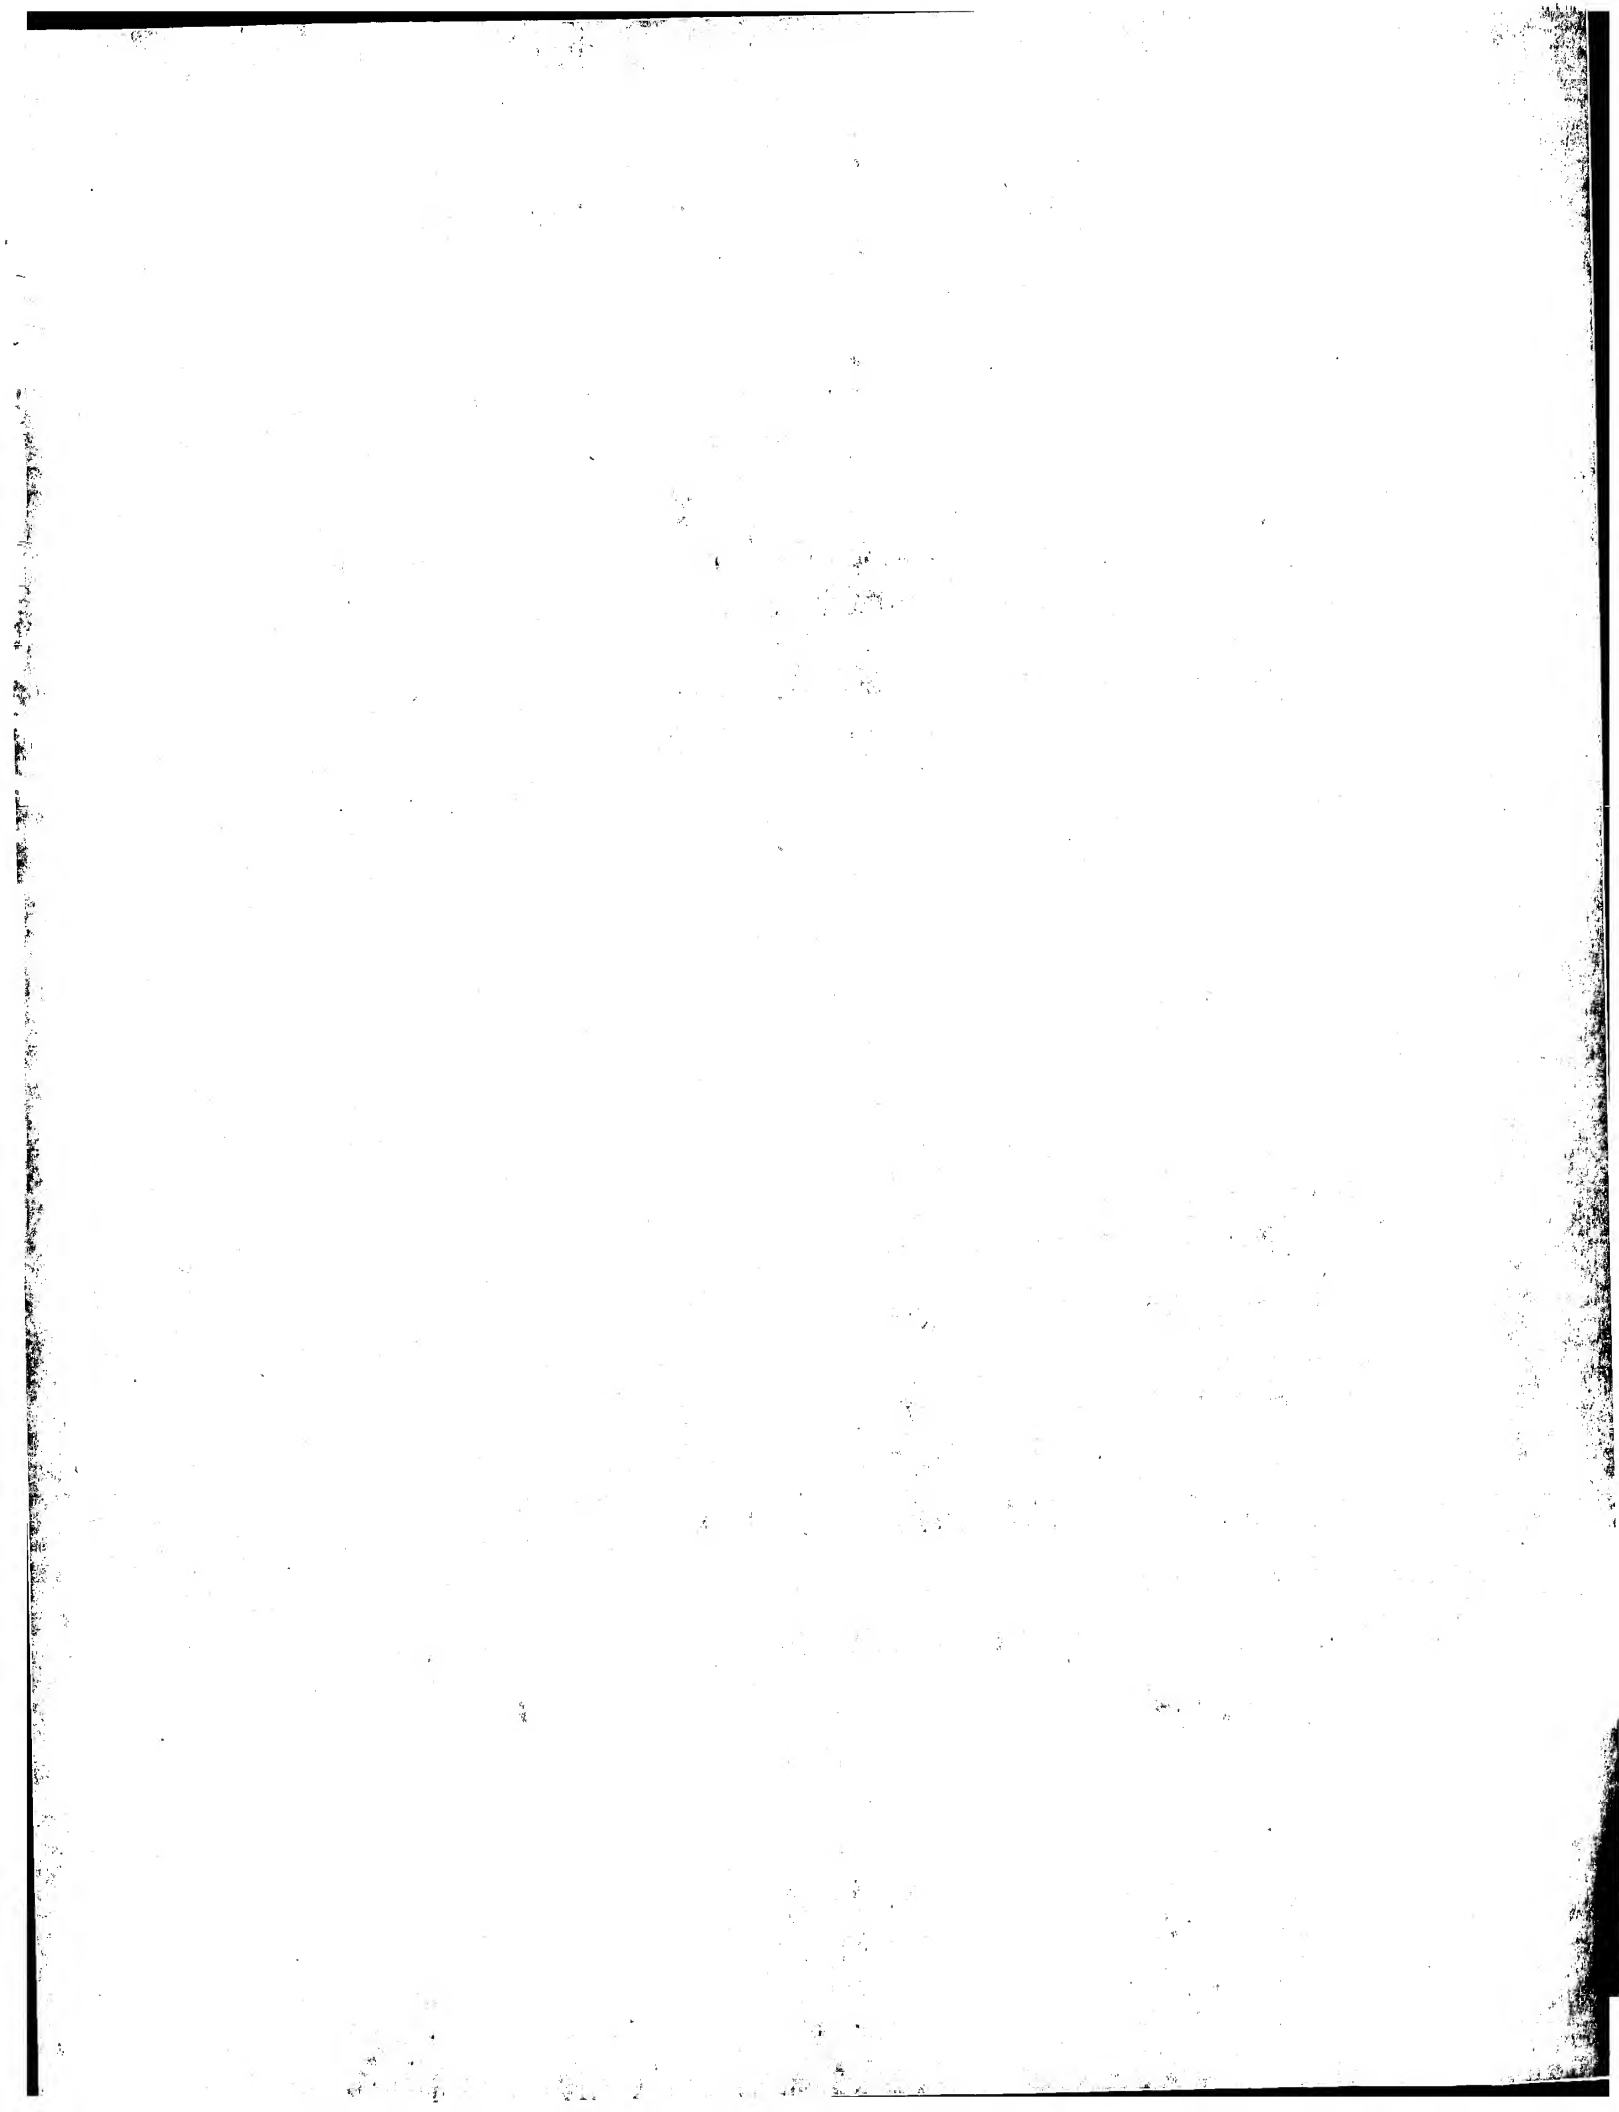



## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s): Paolo SALVONI

Group No.:

Serial No.: 10/664,753

Filed: September 18, 2003

Examiner:

For: SEALABLE PACKAGING CONTAINER, PACKAGING MACHINE AND  
METHOD OF SEALING THE PACKAGING CONTAINER


Commissioner of Patents  
P.O. Box 1450  
Alexandria, VA 22313

## TRANSMITTAL OF CERTIFIED COPY

Attached please find the certified copy of the foreign application  
from which priority is claimed for this case:

Country: EPO  
Application Number: 02021022.5  
Filing Date: 20 September 2002

**WARNING:** "When a document that is required by statute to be certified must  
be filed, a copy, including a photocopy or facsimile transmission of the  
certification is not acceptable." 37 CFR 1.4(f) (emphasis added.)

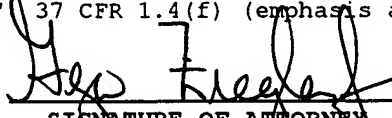  
\_\_\_\_\_  
SIGNATURE OF ATTORNEY  
Geza C. Ziegler, Jr.

Reg. No.: 44,004

Type or print name of attorney

Tel. No.: (203) 259-1800

Perman &amp; Green, LLP

Customer No.: 2512

425 Post Road, Fairfield, CT 06824

NOTE: The claim to priority need be in no special form and may be made by  
the attorney or agent if the foreign application is referred to in the oath  
or declaration as required by § 1.63.

## CERTIFICATE OF MAILING


I hereby certify that this correspondence is, on the date shown below,  
being deposited with the United States Postal Service as First Class  
Mail in an envelope addressed to the Commissioner for Patents, P.O. Box  
1450, Alexandria, VA 22313.

Date: 3/11/04

  
\_\_\_\_\_  
Signature

Shannon Watt

(type or print name of person certifying)



Subject of



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

**Patentanmeldung Nr.    Patent application No.    Demande de brevet n°**

02021022.5

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**





Anmeldung Nr:  
Application no.: 02021022.5  
Demande no:

Anmeldetag:  
Date of filing: 20.09.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

CFS Palazzolo  
Via Piantada No. 8  
25036 Palazzolo (BS)  
ITALIE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

**Sealable packaging container, packaging machine and method of sealing the  
packaging container**

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

B65B/

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR





## **Sealable packaging container, packaging machine and method of sealing the packaging container**

The invention relates to a sealable packaging container comprising a packaging tray and a packaging lid each having a circumferential area. The invention further relates to a packaging machine having an upper part and a lower part arranged vertically moveable against each other. Finally the invention relates to a method of evacuating and sealing a packaging container in a packaging machine.

Sealable packaging containers comprising a packaging tray and a packaging lid are well known state of the art. The containers are usually produced by thermoforming of a multilayer plastic film wherein a tray and a lid are formed in different dies. Subsequently, the containers are filled and, particularly when serving as containers for food and the like, evacuated or optionally filled with a gas or a gas mixture and finally sealed.

The containers are usually evacuated through openings drilled into the container which are subsequently relocked. This method of evacuating and sealing containers known in prior art is thus costly and in many cases incomplete.

It was therefore an object of the invention to develop a sealable container which can be opened, evacuated and sealed in one single workstation, a packaging machine for evacuating and sealing a container in one single chamber and a method of evacuating and sealing a sealable container which does not have the disadvantages of prior art.

According to the invention this object is achieved by a sealable packaging container comprising the features of claim 1, a packaging machine comprising the features of claim 7 and a method of evacuating and sealing a sealable container with the features of claim 14. Further advantageous embodiments of the invention are disclosed in the respective dependent claims.

The sealable packaging container according to the invention comprises a tray and a lid each having an essentially horizontal circumferential area whereas at least in

CI0057EP

1

some parts the circumferential area of the lid is larger than the area of the tray. Using this constitution of the container it is possible to lift off at least parts of the lid from the tray by using respective means for this purpose arranged inside the packaging machine. The circumferential area can also be the sealing area. The skilled person understands that the container according to the invention does not have to be opened above its whole circumference. For evacuation and optionally exchanging gas inside the container it is just necessary to open a part of the circumference of the container, especially by flapping the lid from the tray about an axis which is parallel to a lateral edge of the container.

A packaging tray according to the present invention is any packaging tray familiar to the person skilled in the art which is produced from a thermoplastic and dimensionally stable single- or multi-layer film, preferably a film as conventionally used for the packaging of foods.

The invention discloses a packaging container which is inexpensive to produce and easy to handle. The packaging container according to the invention can automatically be evacuated, optionally filled with another gas, and finally sealed in one single working chamber.

In a first preferred embodiment of the invention the circumferential area of the tray contains at least three openings. In a more preferred embodiment of the invention the circumferential area of the tray contains four openings, preferably positioned in the corners of an essentially rectangular sealing package. This preferred embodiment permits the through pins to be directed through the openings and to lift off the lid from the tray. The advantage of this preferred embodiment is that no part of the lid is protruding from the tray. The container is thus compact and easy to handle.

In another preferred embodiment of the invention the circumferential area of the lid is at least in several parts of the essentially horizontal circumference of the container wider than the circumferential area of the tray resulting in an at least partially protruding of the lid's circumferential area in comparison to the circumferential area of the tray. In general but depending on the tray's shape, these protruding parts are distributed on the a perimeter of the container.

CI0057EP

2

In a more preferred embodiment of the sealable packaging container according to the invention these protruding parts of the lid's circumferential area are positioned at the corners of a sealable container.

In a most preferred embodiment of this invention the corners of the circumferential areas are rounded off whereby the roundness of the lid's and the tray's corners do have different radii, the radius of the tray's corner being larger than the radius of the lid's corner.

This most preferred embodiment provides the opportunity to additionally alleviate the opening procedure for the ultimate consumer of the goods stored inside the sealable packaging container.

In a further preferred embodiment of the invention a lug is mounted in each of the regions of at least two preferably diametrically opposing corners. More preferably the lugs are mounted in the region of all corners of the lid or the tray of the sealable packaging container according to the invention. In a most preferred embodiment of the invention those lugs are positioned in the lid and protrude inside the tray of the container when the container is closed. The lugs are serving as guidings for the lid's positioning on the tray.

The advantage of this preferred embodiment of the invention is that the lid is kept secure on top of the tray when being conveyed from the filling station to the sealing station. This is even more useful when the lids are not loaded automatically onto the trays.

Another subject of the present invention is a packaging machine for opening, evacuating and sealing the above described packaging container. By using the packaging machine according to the invention it is possible to open, to evacuate and to seal a sealable packaging container within one single working chamber. The means for opening the container can work at any level of pressure, for example vacuum created in the packaging machine, the container is thus open at any type of ambient and/or modified atmosphere, independently of various pressures or any

CI0057EP

3

cycle logic. The machine thus lowers the production costs and the necessary manpower to handle the machine.

The packaging machine according to the invention comprises a lower and an upper part arranged vertically moveable against each other. The machine contains means for sealing the container and means for opening the container by lifting off the lid from the tray. Furthermore the packaging machine according to the invention comprises means for evacuation of the atmosphere inside the container.

The sealing means are mounted in both the upper part of the machine as well as its lower part. The opening means are mounted preferably inside the lower part of the machine. The upper and the lower part both can be exchanged by parts of the set which are adjusted to different shapes or sizes of the container's tray and lid. In a preferred embodiment of the invention the upper part of the sealing means is moved against the opening means and presses them down until the upper part of the sealing means gets in interaction with the lower part of the sealing means.

In a preferred embodiment of the invention the packaging machine according to the invention comprises a receptacle to insert the container's tray. In this preferred embodiment the opening means are arranged around this receptacle in the lower part of the packaging machine. This preferred embodiment allows an automatic centring of the tray and ensures the effective work of both the sealing and the opening means.

The means for opening the container according to the present invention comprise all possible means which are able to act vertically upwards onto those parts of the lid's circumferential area which protrude about the circumferential area of the tray. These means can be through pins put through openings provided in the tray's circumferential area. In a preferred embodiment of the invention the means are preferably at least three, more preferably four pins that are guided on the periphery of the tray's circumferential area and lift off the lid from the tray when the container's position is lowered inside the packaging machine according to the invention. A skilled person understands that the number of pins is not restricted to a minimum or a maximum quantity. The number of pins has just to allow a stable and secure lift off

CI0057EP

4

operation. A person skilled in the art also understands that the opening means, particularly the pins can also be lifted to vertically remove the lid from the tray, that the lid can be lifted off from the tray as well when the lid is kept in a fixed position and the tray is moved downwards or that a combination of both working steps takes place.

In a further preferred embodiment of the invention the means for opening the packaging container are each mounted on top of spring elements. In this preferred embodiment the force executed by the sealing means acts on top of the opening means and compresses the spring elements. One advantage of this preferred embodiment of the invention is that the sealing means are able to press down the opening means and to get in contact with the sealing area by executing one single movement. Furthermore the opening means do not have to effect a special movement which has to be coordinated with the movement of the sealing means.

In another preferred embodiment the packaging machine according to the invention additionally comprises means for exchanging the gas atmosphere inside the container. This more preferred embodiment provides the opportunity to exchange the air inside the container by an inert gas or an inert gas mixture. After the gas exchange the container is sealed and the gas mixture is held inside the packaging container. The gas exchange means can, as well as the sealing means, be all respective means familiar to the skilled person.

The advantage of this gas exchange is that the packaging machine according to the invention is also able to process packaging containers for perishable goods, particularly food, to be stored inside the sealable container.

Another subject of the present invention is a method of opening, evacuating and sealing a sealable container according to the invention. This method offers the possibility to automatically carry out all steps of opening, evacuating and sealing a sealable packaging container in a series of automatic working steps.

The method comprises the steps of inserting the closed container preferably inside the receptacle provided in the lower part of the machine, subsequently opening the

CI0057EP

5

container by lifting off the lid from the tray and/or pulling down the tray, finally evacuating, reclosing and sealing the container.

In a preferred embodiment of the invention the opening means are fixed and the container is moved downwards inside the lower part of the packaging machine. As a result of this relative movement of the tray to the opening means, the opening means lift off the lid from the tray of the container. After opening the atmosphere inside the container is evacuated and, optionally, exchanged by another, preferably inert gas or an inert gas mixture. Finally the sealing means are moved downwards against the backside of the lid's circumferential area and press, subsequently seal the lid's circumferential area onto the tray's circumferential area.

This preferred embodiment provides the opportunity to carry out the method according to the invention by using a minimum number of moved parts of the machine. It is therefore not necessary to carry out a harmonised movement of a plurality of pins, the movement of the receptacle is thus easy to operate.

The invention is explained in detail in **Figures 1 and 2**. The Figures only show distinct embodiments of the invention and do not restrict the inventive idea in any way.

- Figure 1a** shows a front view, a side view and a top view of a sealable packaging container according to the invention,
- Figure 1b** shows a front view and a top view of another embodiment of the sealable packaging container according to the invention,
- Figure 2a** shows a sealable packaging container inserted into the packaging machine according to the invention in a cross sectional side view,
- Figure 2b** shows the step of lifting off the lid from the tray in a cross sectional side view,

**Figure 2c** shows the step of evacuating the machine according to the invention in a cross sectional side view,

**Figure 2d** shows the step of refilling an inert gas into the machine according to the invention in a cross sectional side view,

**Figure 2e** shows the step of sealing the closed packaging container according to the invention in a cross sectional side view.

In **Figure 1a** a front view, a side view and a top view of the sealable packaging container 1 is depicted. The container 1 comprises a tray 2 and a lid 3 each having a considerably horizontal circumferential areas 4, 5. The circumferential areas 4, 5 serves at least partially as the sealing areas 7a, 7b. The container 1 has an essentially rectangular base with four corners, although the skilled person understands that the container and its circumferential areas can have any shape. The corners of the tray 2 and the lid 3 each are rounded off wherein the radii 8 of tray's corners are bigger than the radii 9 of the lid's corners resulting in parts 20 of the circumferential area 5 of the lid 3 protruding from the circumferential area 4 of the tray 2 i.e. the circumferential area 5 is larger than the circumferential area 4. This results in parts of the lid's 3 corners protruding about the tray's 2 corners and serves as working points for lifting off the lid 3 from the tray 2.

**Figure 1b** shows a front view and a top view of another embodiment of a sealable packaging container 1 as shown in Figure 1. The circumferential areas 4, 5 of the container 1 are rectangular and in each corner of the lid 3 a lug 21 is mounted each being pre-stressed in the outward direction to press onto the inner wall of the tray 2. By this design of the container 1 according to the invention the lid 3 is guided on the tray 2 and kept in a defined position even without the lid 3 being sealed onto the tray 2.

In **Figure 2a** the first working step inside the packaging machine 10 according to the invention is shown. The packaging machine 10 comprises an upper part 11 and a lower part 12 vertically moveable against each other parallel to the axis 23. The closed and filled container 1 is inserted into the packaging machine 10 and placed on

receptacle 13 which itself is part of the lower part 12 of the packaging machine. Around the circumference of the receptacle 13 two of four pins 15 (only two shown) are arranged for opening the container 1. The pins 15 are each mounted on top of springs 19.

In **Figure 2b** the second working step carried out by the packaging machine 10 according to the invention is shown. The lower part 12 is vertically moved against the upper part 11 whereby the receptacle 13 carries out a different movement resulting in a relative movement of the tray 2 to the pins 15. When the pins 15 reach the level of the upper edge 16 of the tray, the pins 15 get in contact to the circumferential area 4 of the lid 3 and subsequently lift off the lid 3 from the tray 2.

In **Figure 2c** the evacuation step is shown. The gas atmosphere inside the machine 10 and the opened container 1 itself is sucked out through openings 24, 25 as shown symbolically by arrows 28, 29.

In **Figure 2d** the working step of gas discharging a gas mixture into the container 1 is pictured. According to the arrows 26, 27 the inert gas is filled into the packaging machine 10 and into the opened container 1 through openings 24, 25.

In **Figure 2e** the working step of sealing the container 1 is pictured. The lid 3 is pressed onto the tray 2 while upper part of sealing means 14 which are arranged inside the upper part 11 of the machine 10 presses onto the pins 15 and subsequently press down the pins 15 and the springs 19 on which they are mounted. For sealing the container 1 the upper part of the sealing means 14 presses onto a lower part of the sealing means (not shown) arranged around the circumference of the tray's sealing area 7a.



**List of reference numbers:**

- 1 container
- 2 tray
- 3 lid
- 4 circumferential area of the tray
- 5 circumferential area of the lid
- 6 pins
- 7a sealing area of the tray
- 7b sealing area of the lid
- 8 radius of the tray's corner
- 9 radius of the lid's corners
- 10 packaging machine
- 11 upper part
- 12 lower part
- 13 receptacle
- 14 sealing means
- 15 opening means
- 16 upper edge of the tray
- 17 evacuation means
- 18 gas exchange means
- 19 spring elements
- 20 protruding parts of the lid's sealing area
- 21 lug
- 23 centre axis of the packaging machine
- 24 opening
- 25 opening
- 26 arrow
- 27 arrow
- 28 arrow
- 29 arrow

CI0057EP

9

**Claims:**

1. Sealable packaging container (1) comprising a packaging tray (2) and a packaging lid (3) each having a circumferential area (4, 5) which is preferably at least partially also the sealing area, characterised in that the area (5) of the packaging lid (3) is larger than the area (4) of the packaging tray (2).
2. Sealable packaging container (1) according to claim 1, characterised in that the area (4) of the tray (2) contains at least three openings for through-pins (6).
3. Sealable packaging container (1) according to anyone of the preceding claims, characterised in that the circumference of area (5) is wider than the circumference of area (4).
4. Sealable packaging container (1) according to anyone of the preceding claims, characterised in that the circumferential areas (4, 5) have corners and the area (5) of the lid (3) is in the region of the corners wider than the area (4) of the tray (2).
5. Sealable packaging container (1) according to claim 4, characterised in that the corners of the sealing areas (4, 5) are rounded off and that the roundness of tray's (2) corners has a radius (8) larger than the radius (9) of lid's (3) corners.
6. Sealable packaging container (1) according to any one of the preceding claims 1 – 5, characterised in that a lug (21) is mounted in each of at least two diametrically opposing corners of the lid (3) or the tray (2) and that the lugs (21) are protruding out of the tray (2) or the lid (3) into the opposing part (2, 3) of the container (1).
7. Packaging machine (10) for sealing a packaging container (1) according to one of claims 1 – 6, having an upper part (11) and a lower part (12) arranged

CI0057EP

10

vertically moveable against each other, characterised in that the packaging machine (10) comprises:

- means (15) for opening the container (1),
- means (17) for evacuation and preferably means (18) for exchanging gas inside the container (1) and
- means (14) for sealing the container (1).

8. Packaging machine (10) according to claim 7, characterised in that the lower part (12) contains a receptacle (13) for holding the tray (2) and that means (15) are lifting means for opening the container (1) by lifting the lid (3) from the tray (2)
9. Packaging machine (10) according to claim 7, characterised in that the lower part (12) contains a receptacle (13) for holding the tray (2) and that opening means (15) keep the lid (3) in its fixed position while the receptacle (13) is moved downwards.
10. Packaging machine (10) according to claim 7, characterised in that the lower part (12) contains a receptacle (13) for holding the tray (2) and that the container (1) is opened by the opening means (15) lifting off the lid (3) from the tray (2) and the receptacle (13) moving downwards.
11. Packaging machine (10) according to any one of the preceding claims 7 - 10, characterised in that the means (15) act upon those parts of the area (5) of the lid (3) which protrude to the area (4) of the tray (2).
12. Packaging machine (10) according to any one of the preceding claims 7 - 11, characterised in that the means (15) are at least three, preferably four vertically arranged pins (15) located at the horizontal circumference of the tray (2) and which extend before evacuation over the upper edge (16) of the tray (2).
13. Packaging machine (10) according to any one of the preceding claims 7 - 12, characterised in that the means (15) are mounted on spring elements (19).

14. Method of sealing a sealable container (1) which comprises a lid (3) and a tray (2), characterised by the steps of:
- inserting the container (1) into the packaging machine (10),
  - opening the container (1) by lifting off the lid(3) from the tray (2) and/or pulling down the tray (2),
  - evacuating, preferably exchanging, the gas atmosphere inside the container (1),
  - sealing the area (5) of the lid (3) onto the area (4) of the tray (2).

CI0057EP

12

2019

KUTZENBERGER &amp; WOLFF

20/09.02 FR 12:42 FAX +49 221 97311110

**abstract**

The invention relates to a sealable packaging container comprising a packaging tray and a packaging lid each having a circumferential area and wherein the area of the lid is larger than the area of the tray. The invention further relates to a packaging machine having an upper part and a lower part arranged vertically moveable against each other and means for opening, evacuating and sealing a packaging container. Finally the invention relates to a method of sealing a packaging container in this packaging machine.

CI0057EP

13

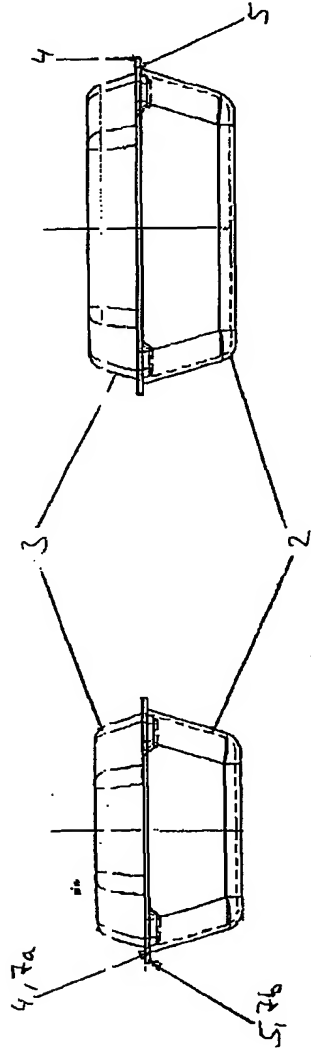


Fig. 1a

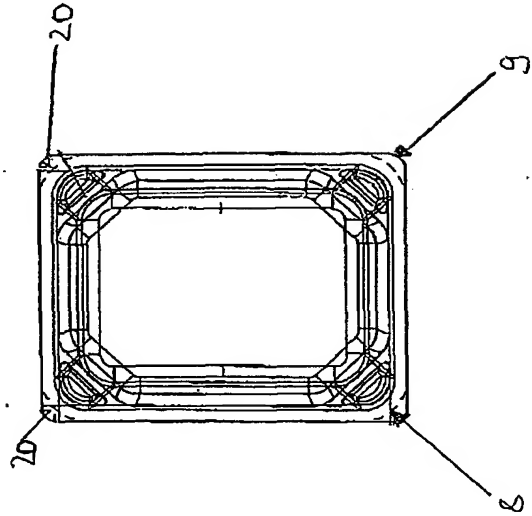


Fig. 1b

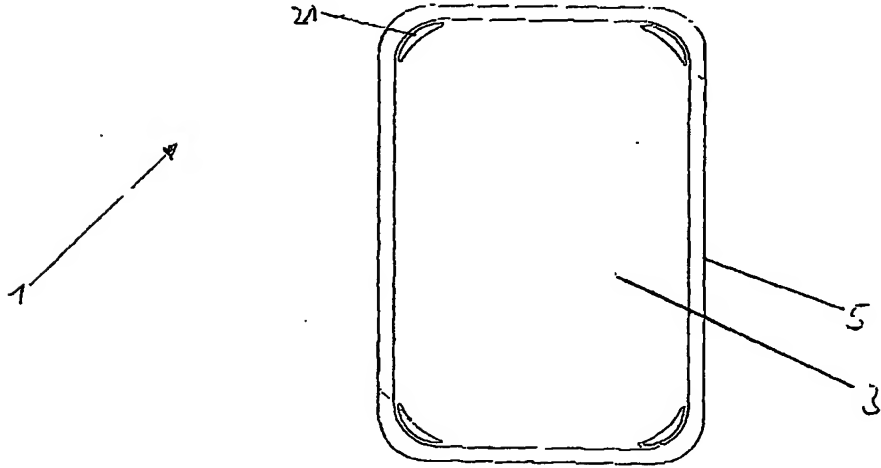
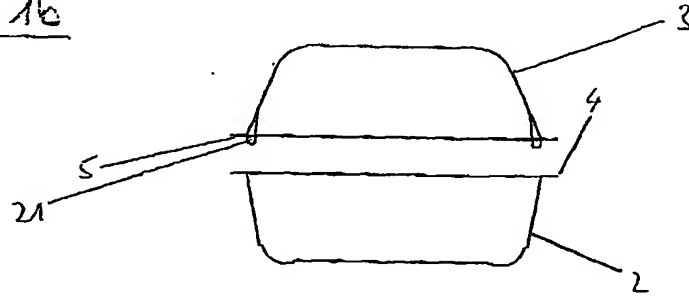


Fig 2a

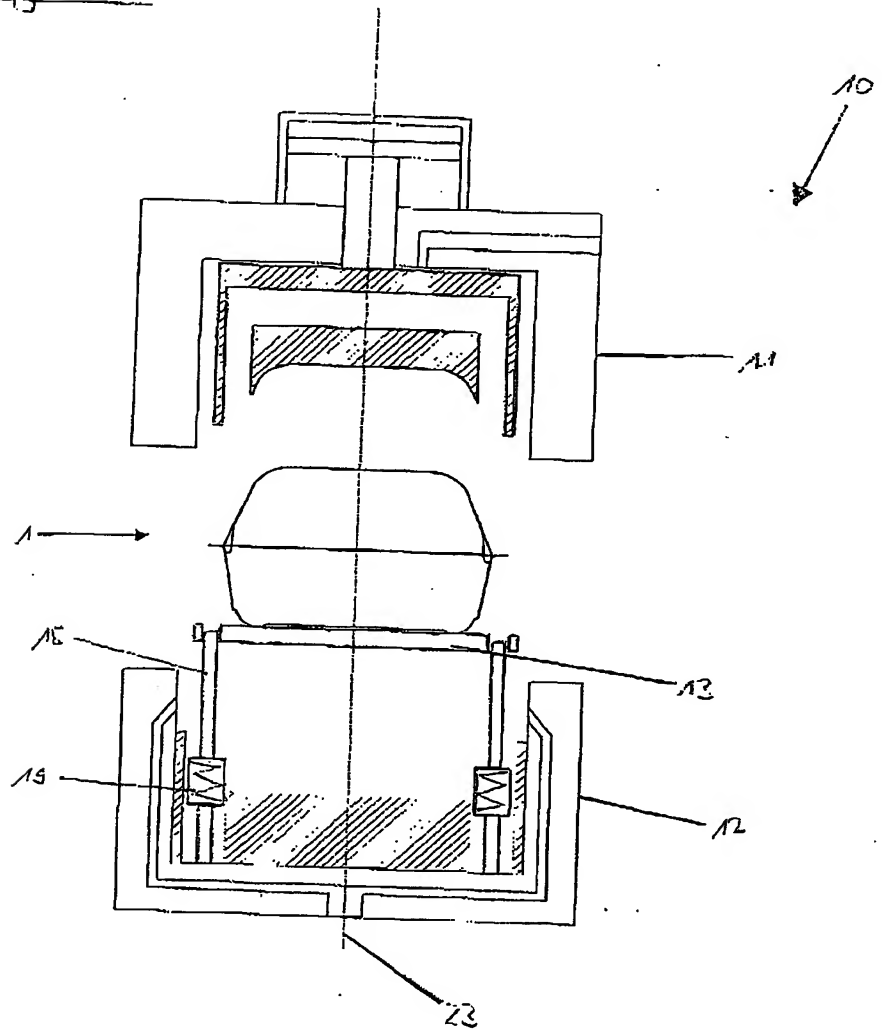
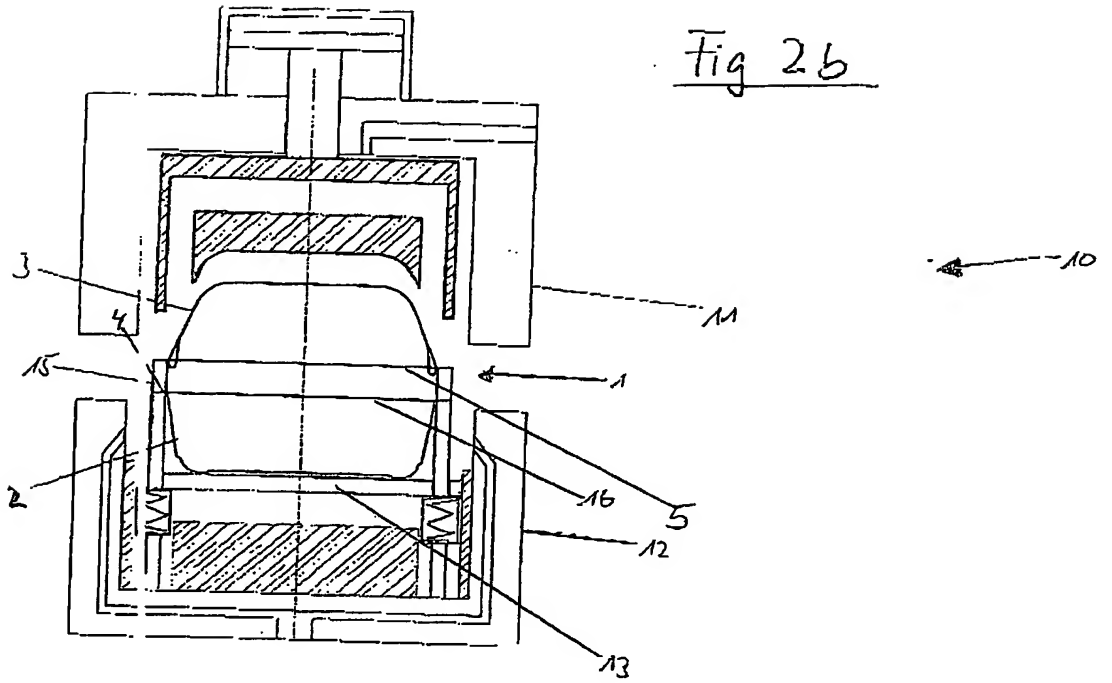




Fig 2b



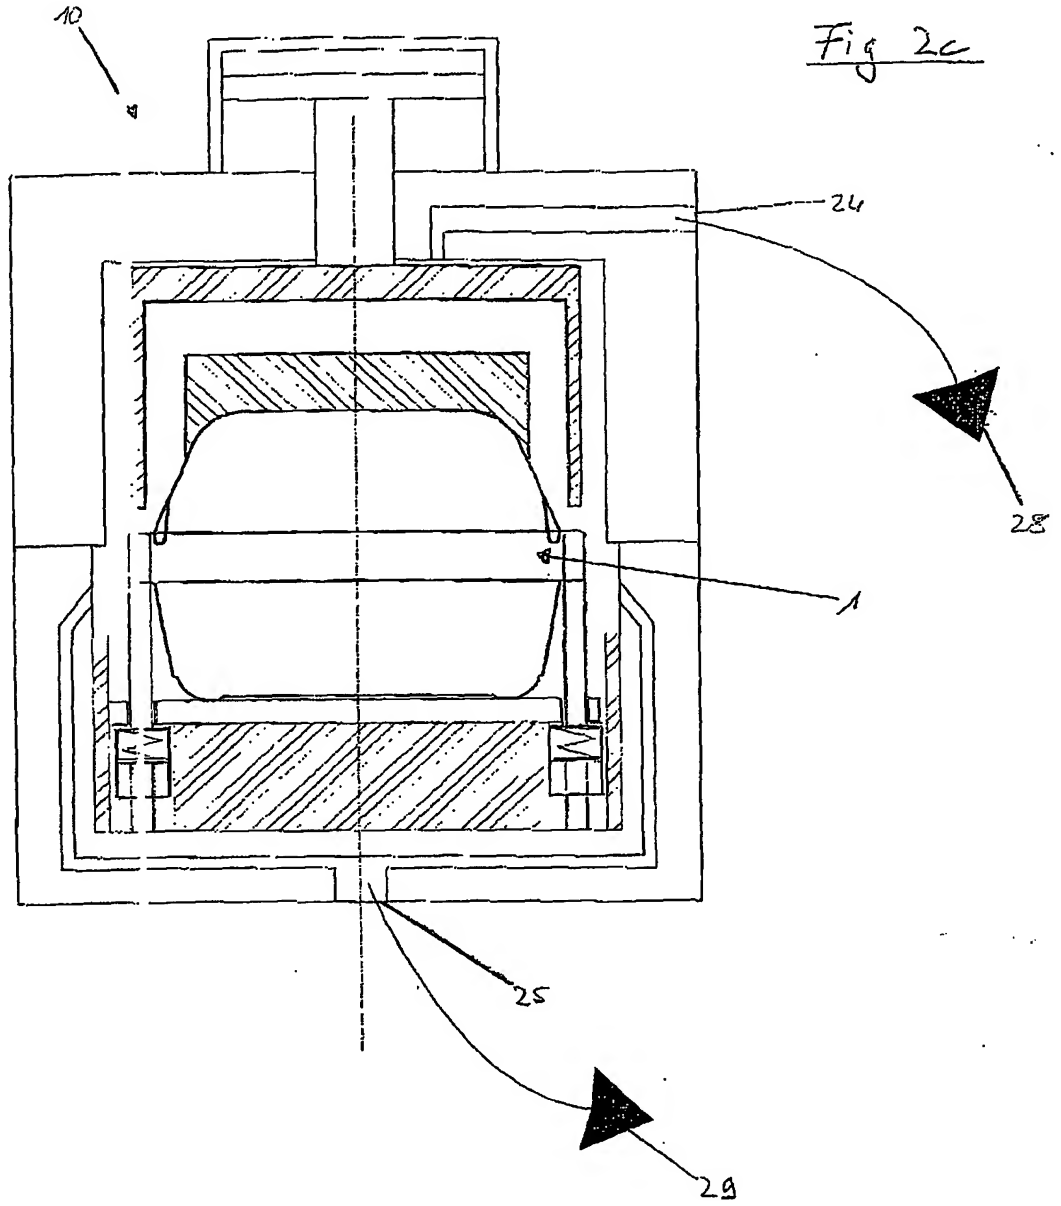


Fig. 2d

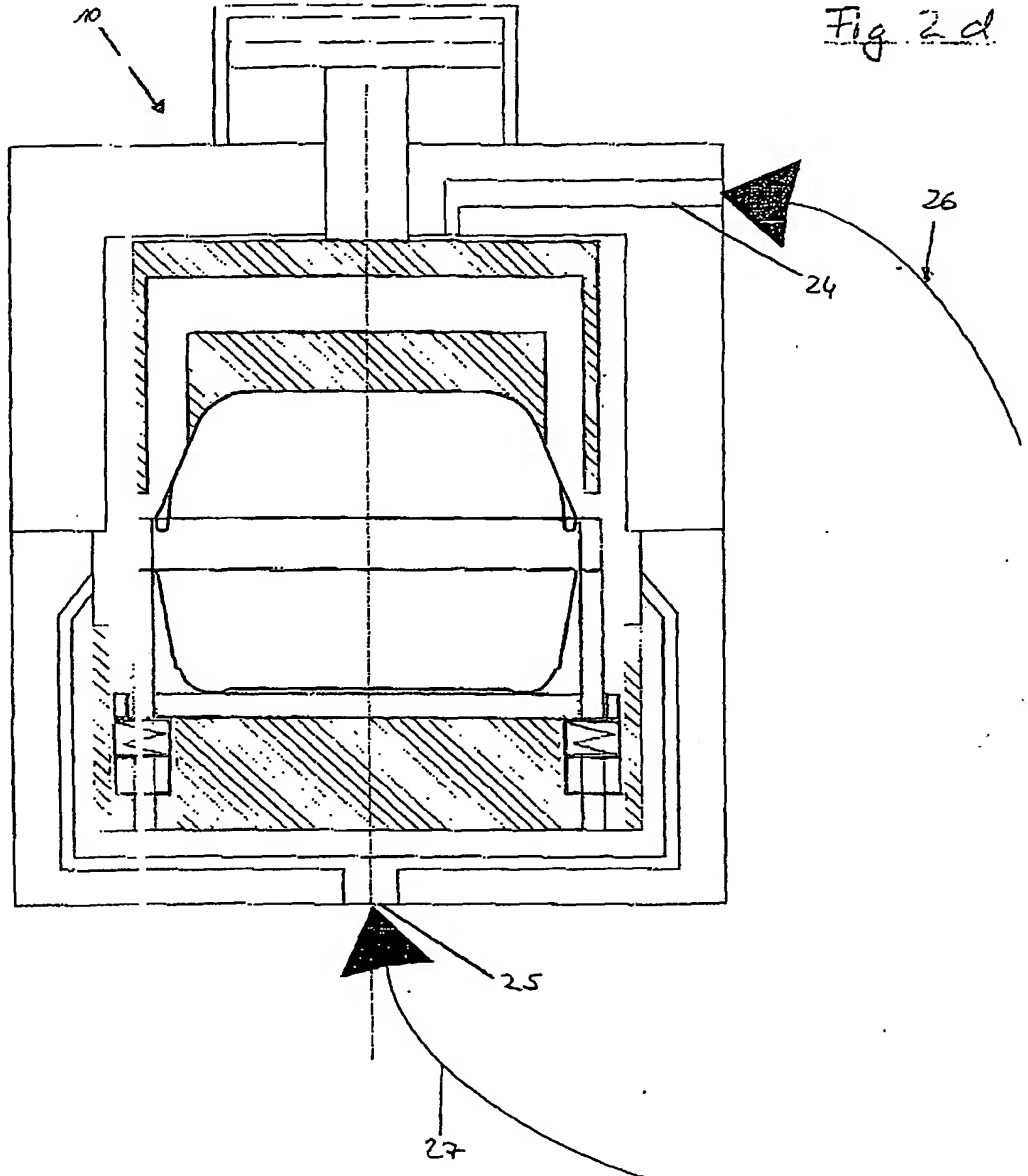


Fig. 2a

